INSTRUCTIONS FOR ACTIVATING, CHARGING AND INSTALLING THE **AGM BATTERY**

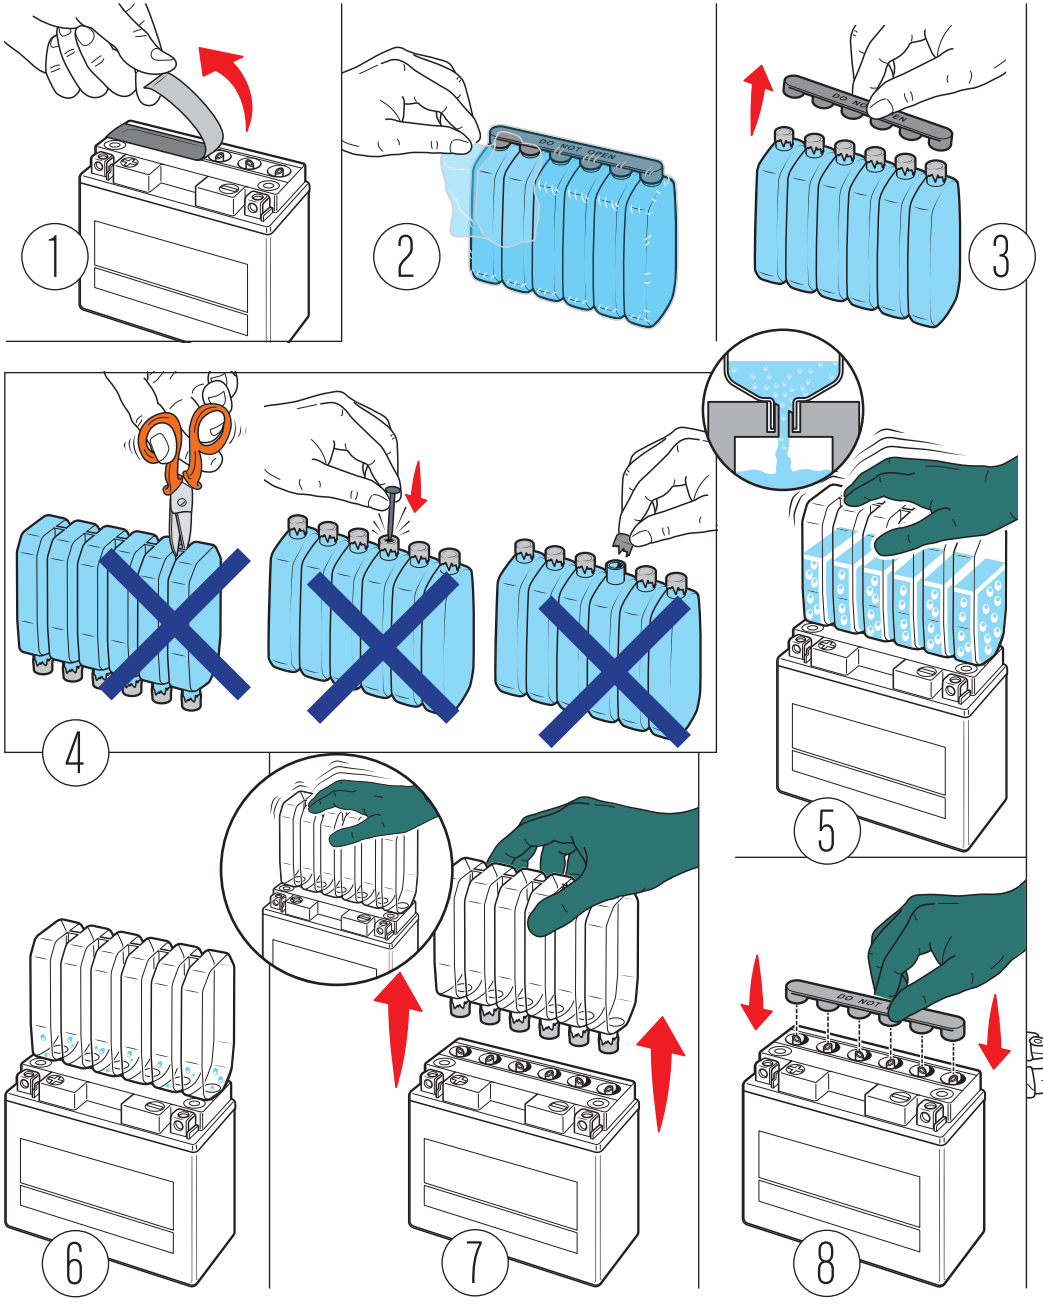

1. Place the battery on a flat surface and remove the protective foil.
2. Remove the protective film from the acid container.
3. Remove the cap and keep it for
4. later use.
   Do not open, cut, or pierce
5. the acid container.
   Turn the acid container vertically upside down and press it onto the
6. battery.
   The seals will break and the acid will start pouring out. Keep the container turned upside down for
7. at least **20 minutes**.
   When the acid has drained out, tap the container delicately to pour out any residues and remove the container carefully.
8. Use the acid container cap to close the battery holes and press all holes well.
   The battery charge state will be
9. about 70-80% after activation. Re-charging is always recommended to install a fully charged battery.